

# Bi-Folding Doors

Product code **BFR4LEAF**


The insulated Bi-folding Door is ideal for opening up to 4.5 metres wide x 4.5 metres high, suitable for industrial and commercial applications.

These doors are especially suitable for low headroom application requiring only 200mm.

Each panel can be fabricated to a width of 1200mm and are finished in a wide range of Plastisol or painted RAL colours. These doors are supported by a top hanging system and guided at the bottom.

## Specifications:- Automatic Doors

- FAAC 560 240v electric motor
- Safety photo beams
- Safety edges
- Remote push buttons
- Remote control
- Induction loop
- Radar activation
- Manual override
- Traffic lights
- Vision panels
- Shoot bolts
- Audio warning

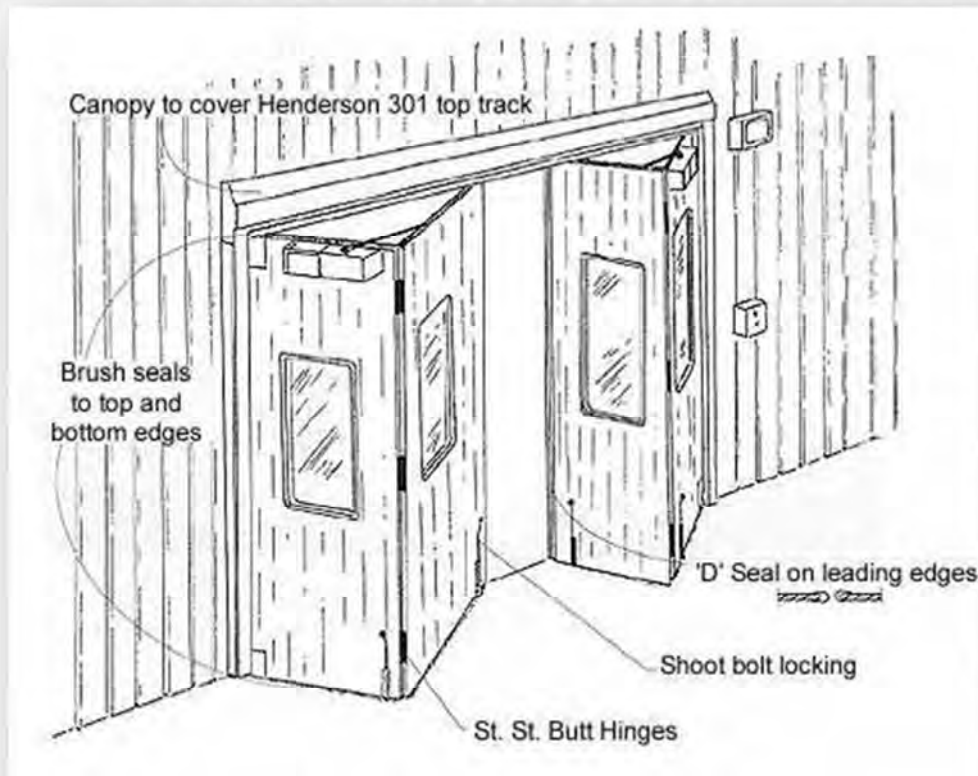

Monday, 18 June 2012 datasheet-bifolding-door-bfr-4leaf.docx

**BI-FOLD ROLFE LTD - Industrial Door Specialist**

Unit 4, Calcot Mount, Calcot Lane, Curdridge, Hampshire S032 2BN

E-Mail: [sales@bifoldrolfe.com](mailto:sales@bifoldrolfe.com) Website: [www.bifoldrolfe.co.uk](http://www.bifoldrolfe.co.uk) Tel: (01489) 780099 Fax: (01489) 780090