



## Insulated Roller Shutter Doors

Product code **BFR 100**

Insulated roller shutters are ideal for situations where energy conservation and protection against the elements, extreme noise and a high level of security are a primary consideration, such as:

- Warehouses
- Distribution centres
- Garages/Factories
- Equipment noise partitioning
- Paint spray booths
- Maintenance buildings
- Storage facilities & Car ports

Insuflex doors suit a wide range of applications from small security shutters to large warehouse openings.

Secureflex operates in the same way as our Insuflex insulated roller shutter. Due to its lightweight composite patented design and formed outer protection it does not require new mechanisms to operate, but can take advantage of existing motor assemblies.

Professional criminal gangs can enter and escape, with the contents of a building within four minutes. Secureflex dramatically increases the amount of time the burglar, using high speed cutting equipment, has to spend entering the building.

Secureflex offers complete protection for your stock, increases your security and could lower your insurance premiums. The doors are custom made to fit any opening and are available in many different finishes to suit the needs of any project regardless of its complexity.


### Specifications:- Insulated Roller Shutters

#### **Insuflex:**

Insulated roller shutters are ideal for situations where energy conservation and protection against the elements, extreme noise and a high level of security.


#### **Secureflex:**


Dramatically increases the amount of time the burglar, using high speed cutting equipment, has to spend entering the building. It offers complete protection for your stock, increases your security and could lower your insurance premiums.

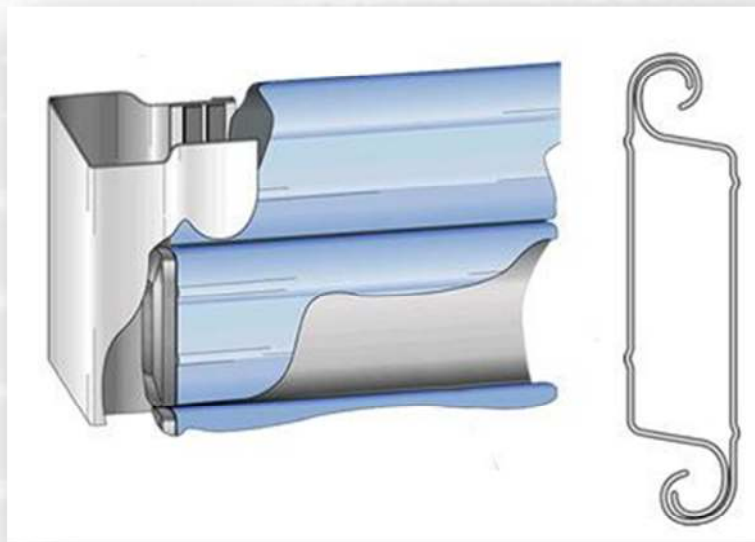

Width	Height	Dim A	Dim B
2500	2500	430	525
4000	4000	500	595
5000	5000	550	645
6000	6000	600	675


Door Hood Addition - Dim B + 50 all dimensions in mm

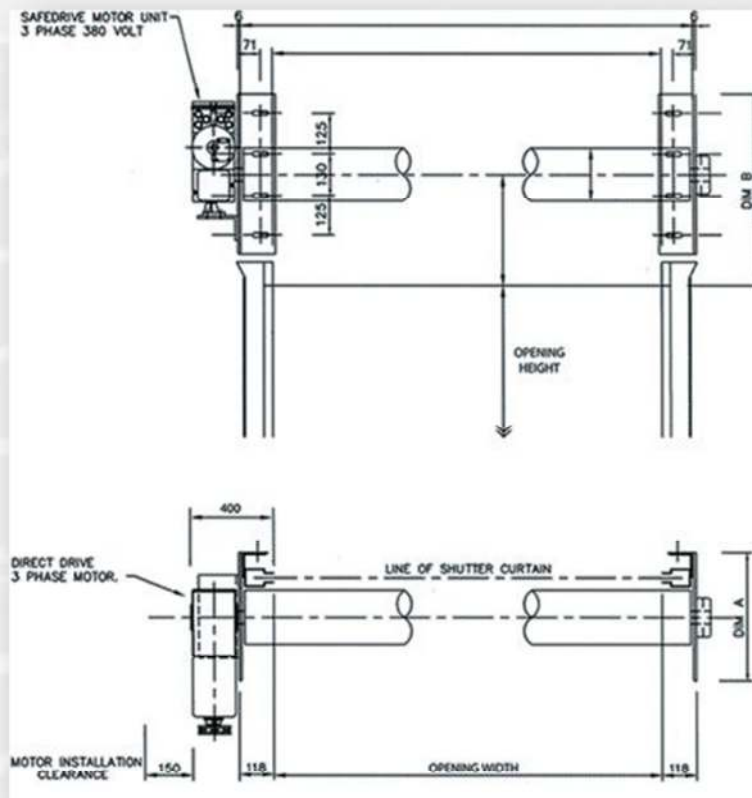

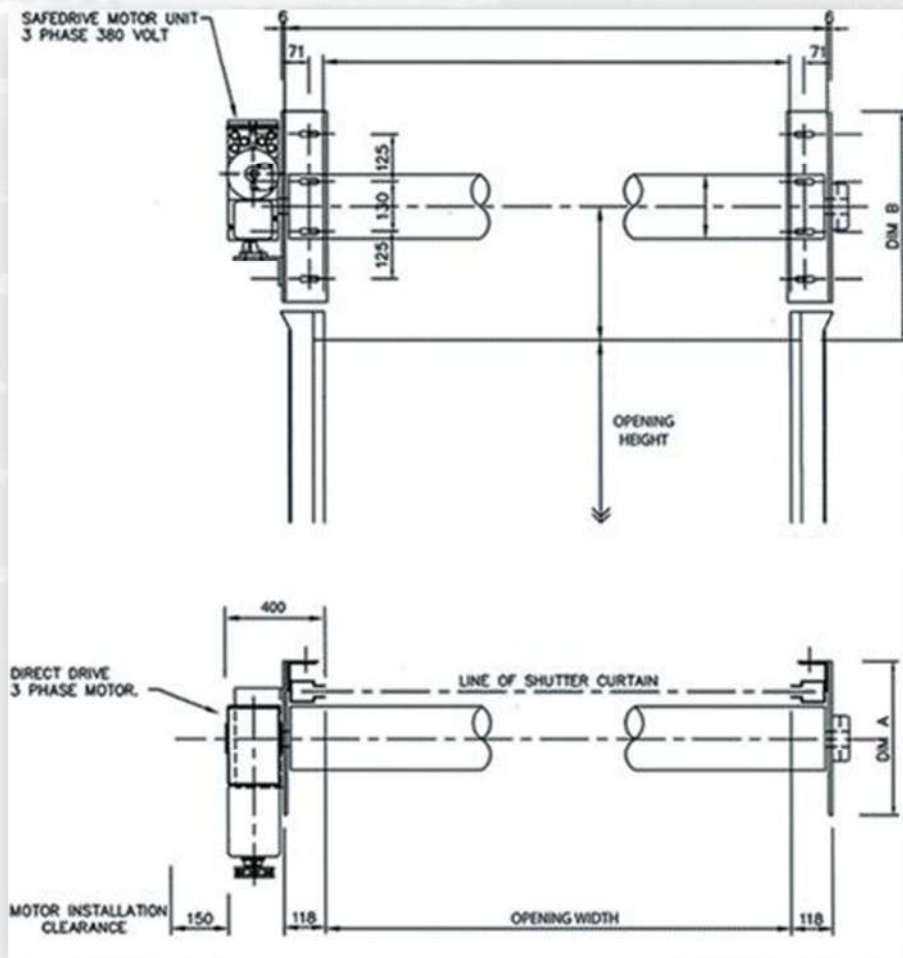

**Secureflex:**

Operates in the same way as our Insuflex insulated roller shutter. Due to its lightweight composite patented design and formed outer protection it does not require new mechanisms to operate, but can take advantage of existing motor assemblies.

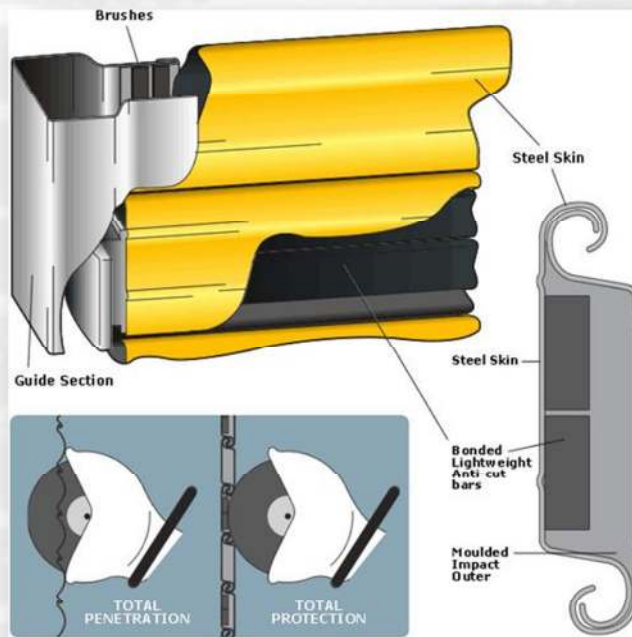

Width	Height	Dim A	Dim B
3000	3000	500	515
4000	4000	500	545
5000	5000	550	645
6000	6000	600	675

Door Hood Addition - Dim B + 50 all dimensions in mm

