

Plastic Grille Shutter




The attractive design of the Plastic Grille will harmonise with most styles of architecture and interior decoration. Although having a wide application it is most suitable where pilfer proof protection is required without sacrificing light, vision or ventilation.

The Plastic Grille has proved extremely popular for counters, bars and kiosks and for individual shop and stall fronts particularly in enclosed shopping precincts.

Constructed from high quality injection moulded plastic links and heat treated alloy rods. Nylon end guides are fitted to both ends of every rod. Lipped side channels help prevent curtain from being forcibly removed.

Bottom rail assembly designed to accommodate full range of locking devices.

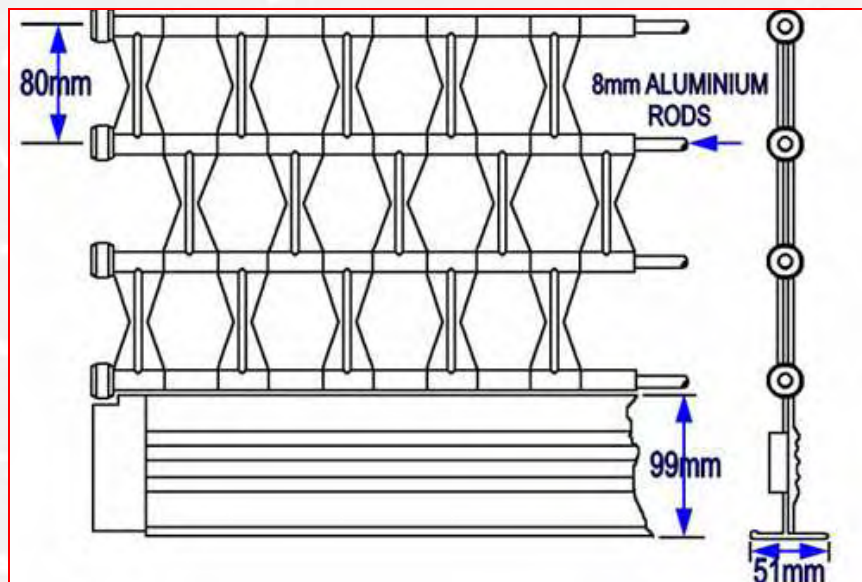

BI-FOLD ROLFE LTD
Industrial Door Specialist

UNIT 4, CALCOT MOUNT, CALCOT LANE, CURDRIDGE, HAMPSHIRE SO32 2BN
Tel: (01489) 780099 Fax: (01489) 780090
E-Mail: sales@bifoldrolfe.com www.bifoldrolfe.com

Constructed from high quality injection moulded plastic links assembled on 8mm diameter heat treated alloy rods, the plastic grille has 22mm diameter nylon end guides fitted to each end of every rod to facilitate ease of movement. The nylon guides nm in lipped side channels designed to prevent the grille curtain from being forcibly removed and help deter unauthorised entry.

Plastic links are produced in five standard colours, white, black, grey, red and brown.

The bottom rail consists of 96mm x 3mm decorative alloy extrusion supported by a robust 50mm x 30mm x 3mm extruded alloy 'T' section. The bottom rail assembly is designed to nm freely inside the lipped side channels and accommodate a full range of locking devices. Bottom rail and side channels are supplied in either silver or gold anodised (15 microns).

The spring barrel assembly, supplied as a pre-tensioned unit, consists of helical springing contained in 102mm diameter extruded alloy tubing mounted on 16mm diameter steel rod. Nylon end bushes are used for durability and to reduce maintenance costs. With the addition of centre 45 degree and 90 degree comer stanchions the plastic grille is suitable for multi-shutter installations.



BI-FOLD ROLFE LTD
Industrial Door Specialist

UNIT 4, CALCOT MOUNT, CALCOT LANE, CURDRIDGE, HAMPSHIRE SO32 2BN
Tel: (01489) 780099 Fax: (01489) 780090
E-Mail: sales@bifoldrolfe.com www.bifoldrolfe.com